


CARTA NATURALE ECOLOGICA

BURGO REPRO ROSSA A4

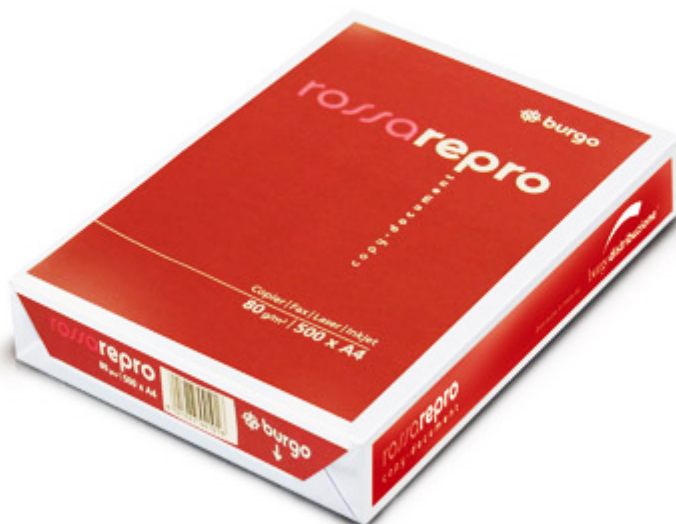

SCHEDA TECNICA

Nome prodotto:	REPRO ROSSA
codice prodotto:	1104490

Data applicazione : 24/02/2012
 Aggiornamento: 20100111

	Unità misura	Norme di riferimento	Valori
Grammatura <i>Toll.</i>	g/m ²	ISO 536	80 +/- 2
Spessore <i>Toll.</i>	µm	ISO 534	104 +/- 4
Opacità <i>Toll.</i>	%	ISO 2471	90 +/-2
Bianco CIE <i>Toll.</i>	%	ISO 11475	140 +/-2
Bianco UV <i>Toll.</i>	%	ISO 2470	104 +/- 2
Ruvidità Bendtsen Feltro Tela <i>Toll.</i>	ml/min	ISO 8791-2	250 240 +/- 50
Rigidità L & W Long Trasv <i>Toll.</i>	mN	UNI 9070	4 1,5 +/- 0,5

I valori riportati sono da considerarsi indicativi

Materie prime: 100% pura cellulosa tipo ECF

Certificazioni: ISO 9001:2008; ISO 14001:2004




Le fibre vergini impiegate provengono da fonti a gestione ambientale sostenibile.

Il prodotto è conforme alla norma ISO 9706, esente da acidi per lunga conservazione.

CARTA NATURALE ECOLOGICA

BURGO REPRO VERDE A3

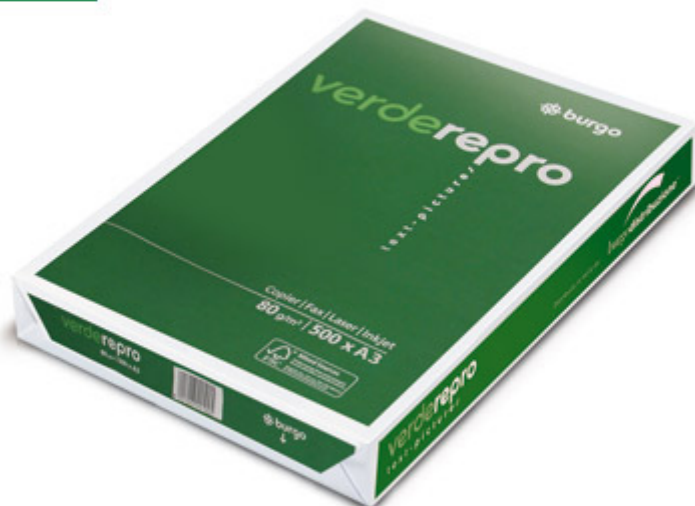

SCHEDA TECNICA

Nome prodotto:	REPRO VERDE
codice prodotto:	1104425

Data applicazione : 19/09/2011
 Aggiornamento: 20100111

	Unità misura	Norme di riferimento	Valori
Grammatura <i>Toll.</i>	g/m ²	ISO 536	80 +/- 2
Spessore <i>Toll.</i>	µm	ISO 534	103 +/- 4
Opacità <i>Toll.</i>	%	ISO 2471	90 +/-2
Bianco CIE <i>Toll.</i>	%	ISO 11475	152 +/-2
Bianco UV <i>Toll.</i>	%	ISO 2470	108 +/- 2
Ruvidità Bendtsen Feltro Tela <i>Toll.</i>	ml/min	ISO 8791-2	250 240 +/- 50
Rigidità L & W Long Trasv <i>Toll.</i>	mN	UNI 9070	4 1,5 +/- 0,5

Materie prime: 100% pura cellulosa tipo ECF
 (senza utilizzo di biossido di cloro)

Certificazioni: ISO 9001:2008; ISO 14001:2004; FSC

Le fibre vergini impiegate provengono da boschi a gestione ambientale sostenibile.



CARTA RICICLATA ECOLOGICA

STEINBEIS CLASSIC WHITE A4



DATA SHEET
STEINBEIS Classic White

january 2011

01. Product

STEINBEIS Classic White, multi-function paper

02. Application

copiers · printers (LED, Laser, Magnet, Ionen) · ink-jet printers · telefaxes · pre printing

03. Product make-up **Graphic recycled paper of 100% waste paper**

- Raw material postconsumer waste (newspapers, magazines) from household collections and offices according to regulations of the environmental label RAL-UZ 14 "Blue Angel"
- Fillers Caolin and calcium carbonate
- Surface Treated with starch
- Sizing Non-acidic synthetic surface sizing system
- Additives The additives used are free from organic chlorine compounds and do not lead to AOX formation

04. Product description

The paper is available in natural white, various sizes and five colours

05. Environmental Labels

Germany > Blue Angel · Scandinavia > Nordic Environmental Label (Green Swan)

06. Aging properties

The paper possesses longevity. It fulfills the requirements of LDK 24-85 of DIN 6738 (lifespan classes). Paper in this aging classification may be called longevity, since it has an expected life which meets the highest requirements, if suitable care in handling and storage is guaranteed.

07. Dermatologically and toxicologically safe

Proofed by an independant laboratory, paper can be used without hesitation in regular application. Using this paper does not involve any hazards to the environment. The material used is conform to the XXXVI. recommendation issued by the "Federal institute for risk assessment" on paper-cartons and cardboard for the food industry. Under regular application , further investigations have shown that the paper is not injurious to health.

08. Certificate DIN EN ISO 9001

The TÜV CERT certification body of TÜV Nord confirms Steinbeis Papier GmbH has established and applies a quality system for "production and distribution of office and printing papers". Performed by an audit, proof has been furnished that the requirements according to DIN EN ISO 9001 are fulfilled.

DATA SHEET
STEINBEIS Classic White

january 2011

09. Certificate DIN EN ISO 14001

The TÜV CERT certification body of TÜV Nord confirms Steinbeis Papier GmbH has established and applies an environmental system for "production and distribution of office and printing papers". Performed by an audit, proof has been furnished that the requirements according to DIN EN ISO 14001 are fulfilled.

10. EMAS-Logo (Register-Nr. DE-S-140-00033)

The aim of the Eco-Management and Audit Scheme (EMAS) is to promote continuous environmental improvements. It is a voluntary scheme for organisations willing to commit themselves to evaluate and improve their environmental performance. Independently and externally validated, the environmental policy, environmental programme and environmental management system of Steinbeis Papier Glueckstadt GmbH & Co. KG fulfils the requirements of the EMAS. Steinbeis Papier GmbH is listed at the "Industrie und Handelskammer Kiel / Germany" (Registration No. DE-S-140-00033).

11. Migration of impurities

As requested by the standard DIN EN 12281, paragraph 7 the paper manufacturer has to state that the control of the production takes care about migration of certain impurities which will have negative impact on xerographic machines.

12. Vapours during thermal fixing process

Emissions caused by the heating adjustment of laser printers are essentially derived from offset printing inks remained in the recycling paper after deinking process. By newest deinking technology these printing inks and thus the emissions can be reduced to a minimum. Beyond that the choice of the used type of printer can affect the emissions clearly more than the paper. Investigations of the "Federal Institute for material research and testing" showed that the interior air quality of office space keeps the requirements of the AgBB evaluation pattern for building products when using workplace printers and appropriate printing volume.

13. Wrapping

The wrapping material is based on a non vapourification layer (Polyethylene). Due to the requirements of standard DIN EN 12281, paragraph 8.2, the manufacturer takes care about lowest contamination with impurities on the wrapping material.

14. Fire risk

Flammability and combustibility correspond with normal organic fibres. Use standard fire extinguishers to quench fires.

15. Disposal

The paper can be recycled, incinerated or disposed of. Even the packaging is environmental friendly. Ream wrapper, carton, wrapping band (PP) and shrink wrap (LDPE) can be incinerated or disposed of.

DATA SHEET
STEINBEIS Classic White

january 2011

16. Storage

Avoid storage under of extreme temperatures and atmospheric humidity. The multi-function paper should not be stored directly to heating, air conditioning system or exposed into the sun. Frost leads to damages of the sheet structure and functionality! Also, the multi-function paper properties are negatively effected by any source of heat and coldness.

Recommended Storage conditions

Room temperature: min: 10 °C to max. 30 °C
Relative atmospheric humidity: min: 20 % RH to max. 80 % RH

17. Processing information

The multi-function paper should be allowed to acclimatized 24 h prior to use in the processing room. It is advisable to open the wrapping right before use. Please avoid extreme temperature variation. Notice that multi-function paper is manufactured with lower absolute moisture content, relatibve humidity approx. 30 % RH.

Favourable conditions

Room temperature: min: 18 °C to max. 24 °C
Relative atmospheric humidity: min: 40 % RH to max. 60 % RH

DATA SHEET

STEINBEIS Classic White

january 2011

18. Regulations of DIN EN 12281

STEINBEIS Classic White, multi-function paper

Characteristic	DIN EN 12281	Test Methods	Remarks	Unit	Values
grammage	± 4 %	DIN EN ISO 536	--	g/m ²	80 ± 3,2
caliper	--	DIN EN 20534	--	µm	102 ± 6,0
moisture content	3,8 to 5,6	DIN EN 20287	--	%	5,1 ± 0,4
brightness	--	ISO 2470	ISO brightness D65	%	70 ± 2,5
whiteness	--	ISO 11475	CIE whiteness D65	--	55 ± 2,5
opacity	> 85	ISO 2471	for duplex use	%	> 95
writing properties of paper by ink	--	DIN 53126	--	--	yes
pH - value	--	DIN 53124	--	--	> 7 (neutral)
surface strength	--	ISO 3783	to be used with medium viscosity oil and max. speed: 2,4 m/s	m/s	> 2,0
abrasion resistance	≤ 20 mg / 100 revolutions	DIN 53109	to be used with a 500 g weight	mg	≤ 20 mg
Coefficient of static friction	0,4 to 0,6	ISO 15359: 1999 passage 9.2 and 10.1		--	0,5 ± 0,1
surface resistivity	10 ⁸ to 10 ¹¹	DIN IEC 60093	to be used with 500 V on isolated base-electrode for 15 s	Ω	10 ⁸ bis 10 ¹¹
toner adhesion	> 0,8	DIN EN 12283	--	--	> 0,8
cutting quality	95 % < 5 98 % < 6	DIN EN 12281 Annex C	--	--	95 % < 5 98 % < 6
curl before copy	MD: ≤ 2,00 CD: ≤ 1,25	ISO 14968	--	m ⁻¹	MD: ≤ 2,00 CD: ≤ 1,25
runnability	--	DIN EN 12281 Annex A	--	‰	is fulfilled
size	--	DIN EN ISO 20216	DIN - format	mm	A4: 210 x 297 / ± 2,0 A3: 297 x 420 / ± 2,0
machine direction	--	DIN EN 644	DIN - format	--	A4: long grain A3: short grain

STEINBEIS Classic White fulfills the requirements of **DIN EN 12281**

CARTA RICICLATA ECOLOGICA

STEINBEIS CLASSIC WHITE A3



DATA SHEET
STEINBEIS Classic White

january 2011

01. Product

STEINBEIS Classic White, multi-function paper

02. Application

copiers · printers (LED, Laser, Magnet, Ionen) · ink-jet printers · telefaxes · pre printing

03. Product make-up **Graphic recycled paper of 100% waste paper**

- Raw material postconsumer waste (newspapers, magazines) from household collections and offices according to regulations of the environmental label RAL-UZ 14 "Blue Angel"
- Fillers Caolin and calcium carbonate
- Surface Treated with starch
- Sizing Non-acidic synthetic surface sizing system
- Additives The additives used are free from organic chlorine compounds and do not lead to AOX formation

04. Product description

The paper is available in natural white, various sizes and five colours

05. Environmental Labels

Germany > Blue Angel · Scandinavia > Nordic Environmental Label (Green Swan)

06. Aging properties

The paper possesses longevity. It fulfills the requirements of LDK 24-85 of DIN 6738 (lifespan classes). Paper in this aging classification may be called longevity, since it has an expected life which meets the highest requirements, if suitable care in handling and storage is guaranteed.

07. Dermatologically and toxicologically safe

Proofed by an independant laboratory, paper can be used without hesitation in regular application. Using this paper does not involve any hazards to the environment. The material used is conform to the XXXVI. recommendation issued by the "Federal institute for risk assessment" on paper-cartons and cardboard for the food industry. Under regular application , further investigations have shown that the paper is not injurious to health.

08. Certificate DIN EN ISO 9001

The TÜV CERT certification body of TÜV Nord confirms Steinbeis Papier GmbH has established and applies a quality system for "production and distribution of office and printing papers". Performed by an audit, proof has been furnished that the requirements according to DIN EN ISO 9001 are fulfilled.

DATA SHEET
STEINBEIS Classic White

january 2011

09. Certificate DIN EN ISO 14001

The TÜV CERT certification body of TÜV Nord confirms Steinbeis Papier GmbH has established and applies an environmental system for "production and distribution of office and printing papers". Performed by an audit, proof has been furnished that the requirements according to DIN EN ISO 14001 are fulfilled.

10. EMAS-Logo (Register-Nr. DE-S-140-00033)

The aim of the Eco-Management and Audit Scheme (EMAS) is to promote continuous environmental improvements. It is a voluntary scheme for organisations willing to commit themselves to evaluate and improve their environmental performance. Independently and externally validated, the environmental policy, environmental programme and environmental management system of Steinbeis Papier Glueckstadt GmbH & Co. KG fulfils the requirements of the EMAS. Steinbeis Papier GmbH is listed at the "Industrie und Handelskammer Kiel / Germany" (Registration No. DE-S-140-00033).

11. Migration of impurities

As requested by the standard DIN EN 12281, paragraph 7 the paper manufacturer has to state that the control of the production takes care about migration of certain impurities which will have negative impact on xerographic machines.

12. Vapours during thermal fixing process

Emissions caused by the heating adjustment of laser printers are essentially derived from offset printing inks remained in the recycling paper after deinking process. By newest deinking technology these printing inks and thus the emissions can be reduced to a minimum. Beyond that the choice of the used type of printer can affect the emissions clearly more than the paper. Investigations of the "Federal Institute for material research and testing" showed that the interior air quality of office space keeps the requirements of the AgBB evaluation pattern for building products when using workplace printers and appropriate printing volume.

13. Wrapping

The wrapping material is based on a non vapourification layer (Polyethylene). Due to the requirements of standard DIN EN 12281, paragraph 8.2, the manufacturer takes care about lowest contamination with impurities on the wrapping material.

14. Fire risk

Flammability and combustibility correspond with normal organic fibres. Use standard fire extinguishers to quench fires.

15. Disposal

The paper can be recycled, incinerated or disposed of. Even the packaging is environmental friendly. Ream wrapper, carton, wrapping band (PP) and shrink wrap (LDPE) can be incinerated or disposed of.

DATA SHEET
STEINBEIS Classic White

january 2011

16. Storage

Avoid storage under of extreme temperatures and atmospheric humidity. The multi-function paper should not be stored directly to heating, air conditioning system or exposed into the sun. Frost leads to damages of the sheet structure and functionality! Also, the multi-function paper properties are negatively effected by any source of heat and coldness.

Recommended Storage conditions

Room temperature: min: 10 °C to max. 30 °C
Relative atmospheric humidity: min: 20 % RH to max. 80 % RH

17. Processing information

The multi-function paper should be allowed to acclimatized 24 h prior to use in the processing room. It is advisable to open the wrapping right before use. Please avoid extreme temperature variation. Notice that multi-function paper is manufactured with lower absolute moisture content, relatibve humidity approx. 30 % RH.

Favourable conditions

Room temperature: min: 18 °C to max. 24 °C
Relative atmospheric humidity: min: 40 % RH to max. 60 % RH

DATA SHEET

STEINBEIS Classic White

january 2011

18. Regulations of DIN EN 12281

STEINBEIS Classic White, multi-function paper

Characteristic	DIN EN 12281	Test Methods	Remarks	Unit	Values
grammage	± 4 %	DIN EN ISO 536	--	g/m ²	80 ± 3,2
caliper	--	DIN EN 20534	--	µm	102 ± 6,0
moisture content	3,8 to 5,6	DIN EN 20287	--	%	5,1 ± 0,4
brightness	--	ISO 2470	ISO brightness D65	%	70 ± 2,5
whiteness	--	ISO 11475	CIE whiteness D65	--	55 ± 2,5
opacity	> 85	ISO 2471	for duplex use	%	> 95
writing properties of paper by ink	--	DIN 53126	--	--	yes
pH - value	--	DIN 53124	--	--	> 7 (neutral)
surface strength	--	ISO 3783	to be used with medium viscosity oil and max. speed: 2,4 m/s	m/s	> 2,0
abrasion resistance	≤ 20 mg / 100 revolutions	DIN 53109	to be used with a 500 g weight	mg	≤ 20 mg
Coefficient of static friction	0,4 to 0,6	ISO 15359: 1999 passage 9.2 and 10.1		--	0,5 ± 0,1
surface resistivity	10 ⁸ to 10 ¹¹	DIN IEC 60093	to be used with 500 V on isolated base-electrode for 15 s	Ω	10 ⁸ bis 10 ¹¹
toner adhesion	> 0,8	DIN EN 12283	--	--	> 0,8
cutting quality	95 % < 5 98 % < 6	DIN EN 12281 Annex C	--	--	95 % < 5 98 % < 6
curl before copy	MD: ≤ 2,00 CD: ≤ 1,25	ISO 14968	--	m ⁻¹	MD: ≤ 2,00 CD: ≤ 1,25
runnability	--	DIN EN 12281 Annex A	--	‰	is fulfilled
size	--	DIN EN ISO 20216	DIN - format	mm	A4: 210 x 297 / ± 2,0 A3: 297 x 420 / ± 2,0
machine direction	--	DIN EN 644	DIN - format	--	A4: long grain A3: short grain

STEINBEIS Classic White fulfills the requirements of **DIN EN 12281**